

UTHERM Roof LE Pro


Insulation board
for roofs

Roof LE Pro is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer and FM Approved.

Application	Insulation boards for flat and low sloped roofs
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	LE Pro: multilayer gastight laminate
Dimensions	Standard: 1200 x 600 mm or 2400 x 1200 mm
Edge finish	Straight on the 4 sides



lambda-value:
0,022
W/m.K

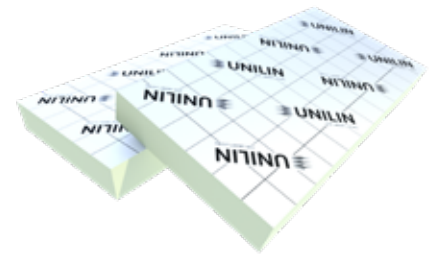


Insulation-thickness [mm]	R _D INSUL value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 22 pal.]	In stock	On demand*
Roof LE Pro: 1200 x 600 mm								
50	2,25	10	7,20	100	72,00	1.584,00	✓	✓
60	2,70	8	5,76	80	57,60	1.267,20	✓	✓
70	3,15	7	5,04	70	50,40	1.108,80	✓	✓
80	3,60	6	4,32	60	43,20	950,40	✓	✓
90	4,05	5	3,60	50	36,00	792,00	✓	✓
100	4,50	5	3,60	50	36,00	792,00	✓	✓
110	5,00	4	2,88	40	28,80	633,60	✓	✓
120	5,45	4	2,88	40	28,80	633,60	✓	✓
140	6,35	3	2,16	36	25,92	570,24	✓	✓
142	6,45	3	2,16	30	21,60	475,20	✓	✓
160	7,25	3	2,16	30	21,60	475,20	✓	✓
180	8,15	2	1,44	24	17,28	380,16	✓	✓
200	9,05	2	1,44	24	17,28	380,16	✓	✓

Insulation-thickness [mm]	R _D INSUL value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 11 pal.]	In stock	On demand*
Roof LE Pro: 2400 x 1200 mm								
50	2,25	10	28,80	50	144,00	1.584,00	✓	✓
60	2,70	8	23,04	40	115,20	1.267,20	✓	✓
70	3,15	7	20,16	35	100,80	1.108,80	✓	✓
80	3,60	6	17,28	30	86,40	950,40	✓	✓
90	4,05	5	14,40	25	72,00	792,00	✓	✓
100	4,50	5	14,40	25	72,00	792,00	✓	✓
110	5,00	4	11,52	20	57,60	633,60	✓	✓
120	5,45	4	11,52	20	57,60	633,60	✓	✓
140	6,35	3	8,64	18	51,84	570,24	✓	✓
142	6,45	3	8,64	15	43,20	475,20	✓	✓
160	7,25	3	8,64	15	43,20	475,20	✓	✓
180	8,15	2	5,76	12	34,56	380,16	✓	✓
200	9,05	2	5,76	12	34,56	380,16	✓	✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ \pm 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-use steel deck)
Long term water absorption	WL(T)2 according to EN 13165 < 2%

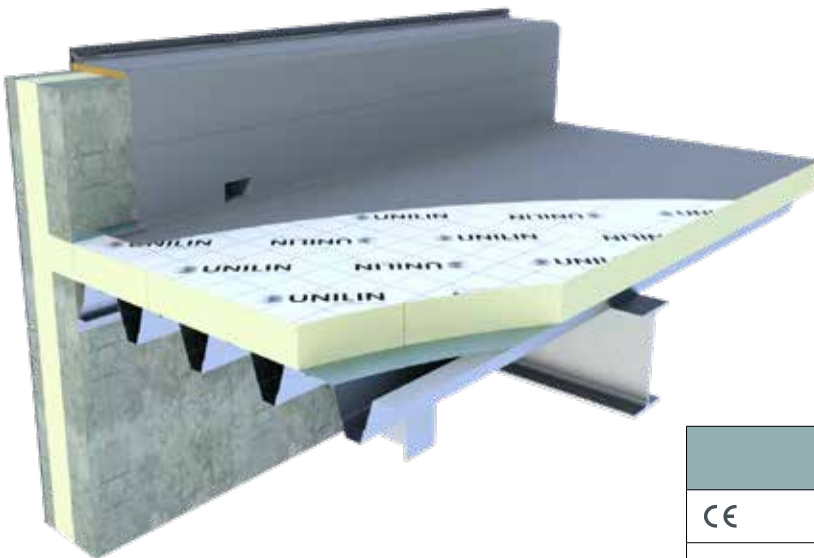

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Roof LE Pro v1
EPD	B-EPD n° 21-0009-004-00-00-EN
FM	FM approved per Approval Standard 4470

Nr. EX-ENG-21-1

For stock- and delivery conditions: inform with UNILIN, division insulation.

UNILIN, division insulation - Waregemstraat 112 - B-8792 Waregem - T +32 56 73 50 91 - F +32 56 73 50 90
E info.insulation@unilin.com - W www.unilininsulation.com - H.R Kortrijk 87153 - VAT BE 0405 414 072